

VISIBLE LIGHT PRODUCTS SPECIFICATION

HTLB4a-AOR AGD ABD



| Drawn by | Checked by | Approved by |
|----------|------------|-------------|
| | | |
| | | |



DATE:2008/11/25

REV:C



HUEY JANN ELECTRONICS INDUSTRY CO., LTD.


No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

DEVICES


| Part Number | Lens | | Source | |
|------------------|-------------|--------------|--|--|
| | Color | Diffusion | Dice Source | Color |
| HTLB4a-AORAGDABD | Water clear | Non-Diffused | AllnGaP/GaAs & GaInN/GaN & GaInN/GaN | Super Fresh Red & Super Green & Super Blue |

PACKAGE DIMENSIONS

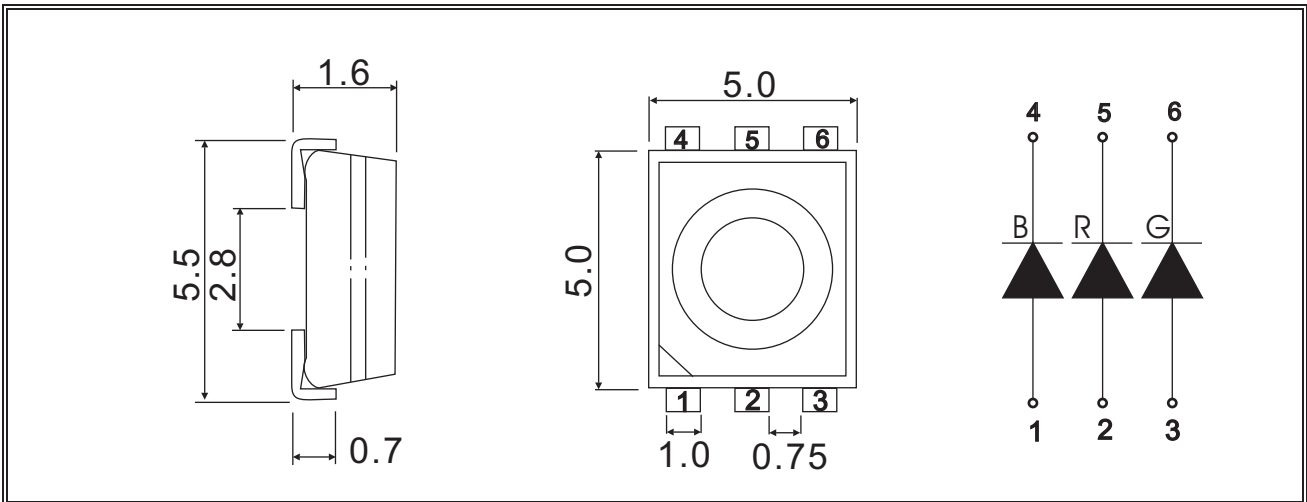

NOTE:

- 1.All dimensions are in millimeter.
- 2.specifications are subject to change without notice.
- 3.Tolerance is 0.3mm unless otherwise noted.




HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125


RECOMMENDED SOLDERING PATTERN

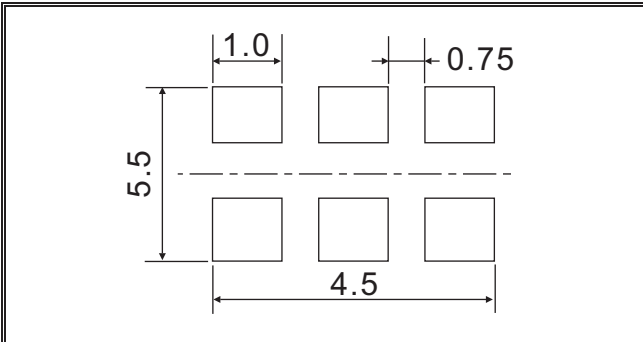

NOTE:


- 1.All dimensions are in millimeter.
- 2.specifications are subject to change without notice.
- 3.Tolerance is 0.3mm unless otherwise noted.

TAPE SPECIFICATIONS

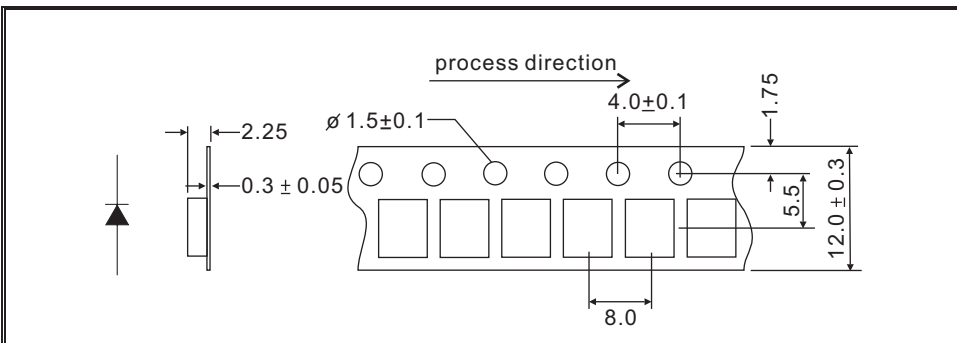

NOTE:

- 1.All dimensions are in millimeter.
- 2.specifications are subject to change without notice.
- 3.Tolerance is 0.3mm unless otherwise noted.



HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125


ABSOLUTE MAXIMUM RATINGS

TA=25°C

| PARAMETER | SYMBOL | MAX. RATING | | | UNIT |
|---|--------|-------------|-------|------|------|
| | | RED | GREEN | BLUE | |
| Power Dissipation | Pd | 100 | 120 | 120 | mW |
| Continuous Forward Current | IF | 25 | 30 | 20 | mA |
| Peak Forward Current *1 | IFM | 50 | 100 | 100 | mA |
| Reverse Voltage | VR | 5 | 4 | 4 | V |
| Electrostatic Discharge(HBM) | ESD | --- | 150 | 150 | V |
| LED Junction Temperature | Tj | 100 | | | °C |
| Operating Temperature | Topr | -40 ~ +85 | | | °C |
| Storage Temperature | Tstg | -40 ~ +100 | | | °C |
| Reflow Soldering (preheat 150-180°C 60-120sec, soldering temp 260°C 5sec) | | | | | |

*1.Duty Ratio=0.1%,Pulse Width=10us.

*2.Iron soldering in 350°C within 5 seconds will not cause damage to the dice. But be aware of the high temperature will not only make the epoxy soften but also cause the lead moving and the gold wire broken and even open. So before returning to the normal temperature PLEASE AVOID any serious pressure on the top of epoxy and lead.



HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

ELECTRIC-OPTICAL CHARACTERISTICS

TA=25°C

| PARAMETER | SYMBOL | TEST CONDITION | MIN | TYP | MAX | UNIT | |
|--------------------------|----------|----------------|-------|-----|-----|------|-----|
| View Angle of Half Power | 2θ1/2 | IF=20mA | Red | 120 | | deg | |
| | | | Green | | | | |
| | | | Blue | | | | |
| Forward Voltage | VF | | Red | | 2.0 | 2.5 | V |
| | | | Green | | 3.2 | 3.6 | |
| | | | Blue | | 3.3 | 3.8 | |
| Luminous Intensity *2 | IV | | Red | 140 | 280 | | mcd |
| | | | Green | 300 | 600 | | |
| | | | Blue | 120 | 210 | | |
| Peak Emission Wavelength | λ p | Red | | 635 | | nm | |
| | | Green | | 523 | | | |
| | | Blue | | 462 | | | |
| Dominate Wave Length *3 | λ d(HUE) | Red | | 625 | | nm | |
| | | Green | | 525 | | | |
| | | Blue | | 465 | | | |

*2.Tolerance:±15% HUEY-JANN measuring equipment : EXELTRON 2001. 2.S370 made by U.D.T.

*3.The dominate wavelength , λ d, is derived from the CIE Chromaticity Diagram and represents the color of the device.



HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.


TEL:+886-4-26393976 FAX:+886-4-26393125

RELIABILITY TEST

| Classification | Test Item | Reference Standard | Test Conditions | Result |
|--------------------|--|---|---|--------|
| Endurance Test | Operation Life | MIL-STD-750:1026 MIL-STD-883:1005 JIS-C-7021 :B-1 | Connect with a power if=20mA Ta=Under room temperature Test Time=1,000hrs | 0/22 |
| | High Temperature High Humidity Storage | MIL-STD-202:103B JIS-C-7021 :B-11 | Ta=+85°C±5°C RH=90% ~ 95% Test Time=1000hrs | 0/22 |
| | High Temperature Storage | MIL-STD-883:1008 JIS-C-7021 :B-10 | High Ta=+100°C±5°C Test Time=1,000hrs | 0/22 |
| | Low Temperature Storage | JIS-C-7021 :B-12 | Low Ta=-40°C±5°C Test Time=1,000hrs | 0/22 |
| Environmental Test | Temperature Cycling | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 JIS-C-7021 :A-4 | -40°C ~ +25°C ~ +85°C ~ +25°C 60min 20min 60min 20min Test Time=200cycle | 0/22 |
| | Thermal Shock | MIL-STD-202:107D MIL-STD-750:1051 MIL-STD-883:1010 | -40°C±5°C ~ +85°C±5°C 20min 20min Test Time=200cycle | 0/22 |

*Failure Criteria:

1. VF arise $\geq 10\%$
2. IV decline $\geq 30\%$
3. A failure is an LED that is open or shorted








HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

TYPICAL ELECTRICAL OPTICAL CHARACTERISTICS CURVES

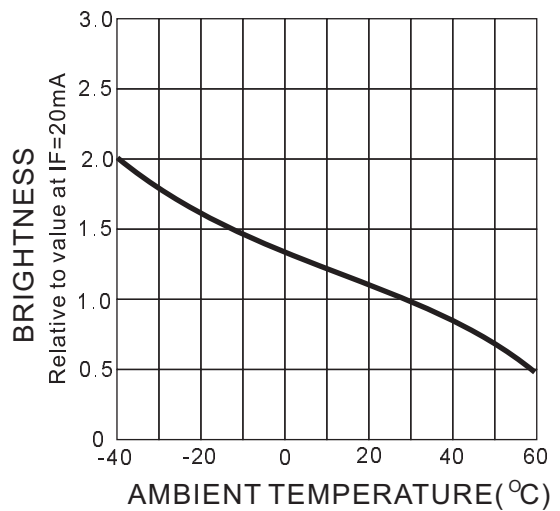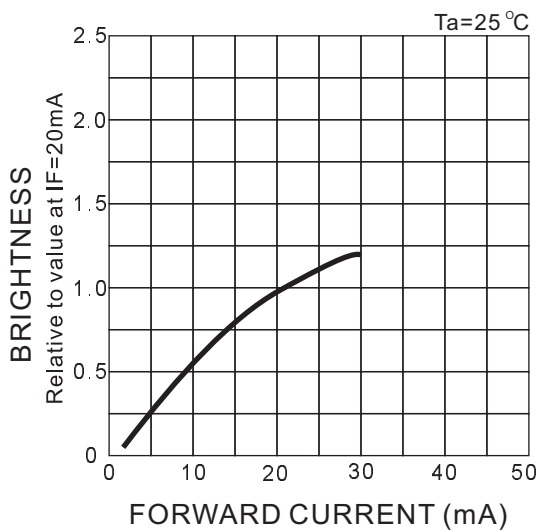
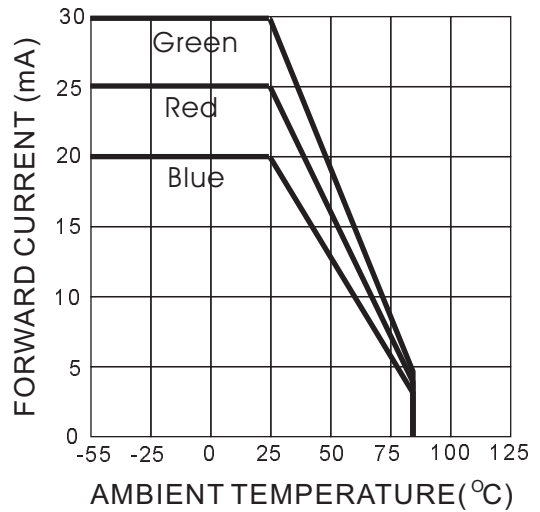
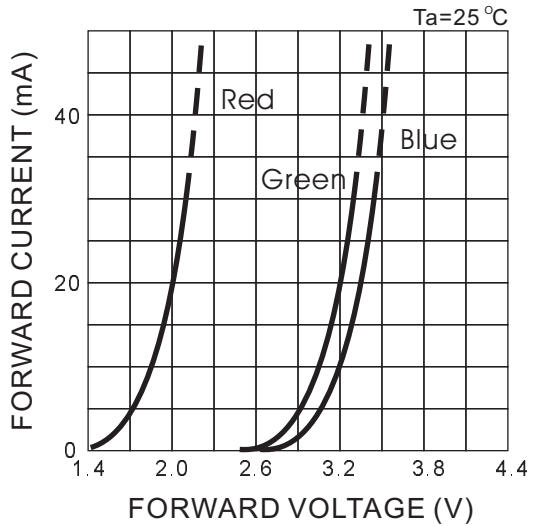


HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Cannng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125

TYPICAL ELECTRICAL OPTICAL CHARACTERISTICS CURVES

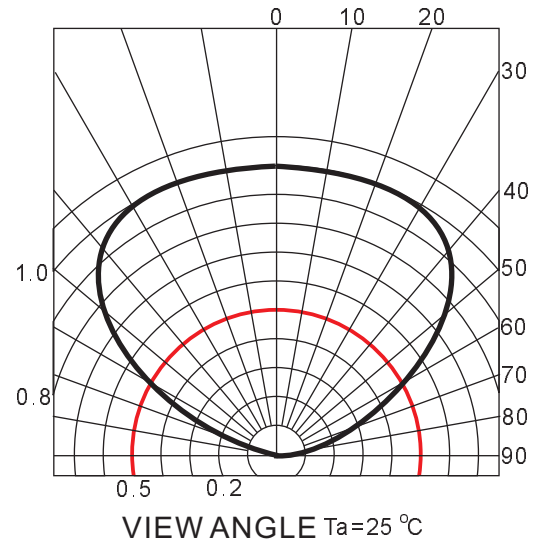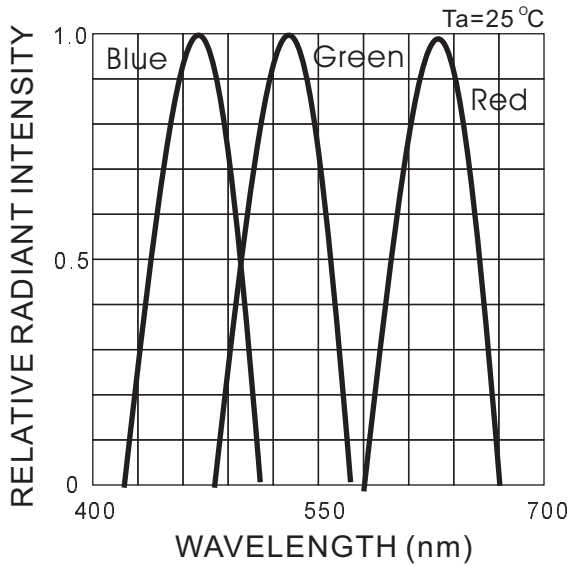

HUEY JANN ELECTRONICS INDUSTRY CO., LTD.

No.27 Line 466 Sec.2,Canng-nan Rd. Wu-chi Town Taichung Shien, Taiwan, R.O.C.

TEL:+886-4-26393976 FAX:+886-4-26393125